



HYDRAULIC REMOVABLE GOOSENECK

We created our Hydraulic Removable Gooseneck trailers specifically for

the safe and efficient front-loading of wheeled and tracked equipment. Every aspect of the design and construction of these trailers allows you to maximize your capacity and handle the demands of challenging load conditions with ease – including heavy-duty construction, lower center of gravity for added stability and multi-axle configurations that meet all weight limits from 35-60 ton capacity.

High Performance Product

All Kalyn Siebert trailers are engineered to exceed the toughest standards in the industry, delivering:

- Maximum strength at low tare weights
- Lowest maintenance costs
- Longest service life
- The highest possible return on investment

You can rest assured that our trailers protect your payload and your investment.

That's the Kalyn Siebert Advantage.



High Performance Design

- Capacity 70,000 lbs –120,000 lbs
- Five position hydraulic removable gooseneck
- Deck/gooseneck design ensure easy hook-up
- Four-beam design with 130,000 PSI yield flanges/ 80,000 PSI yield webs
- 20" loaded deck height/6" ground clearance
- V-style boom trough with last three cross-members in deck recessed

ENGINEERED TO PERFORM. BUILT TO LAST.

**KALYN
SIEBERT®**
A HEIL TRAILER COMPANY

Hydraulic Removable Gooseneck

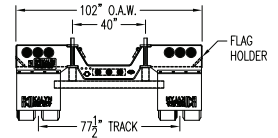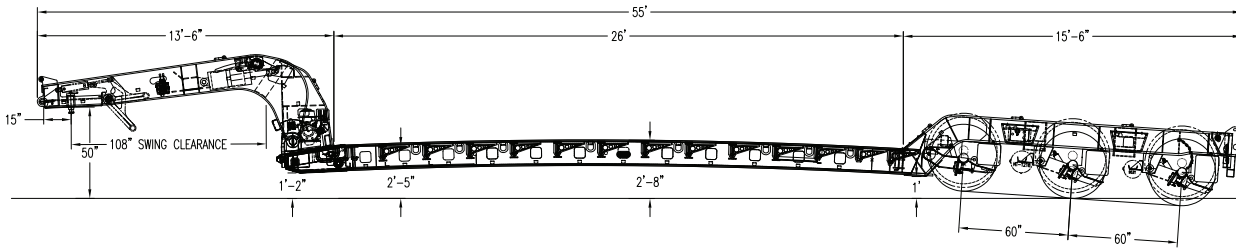

Rear View

Standard Specs

MAIN DECK

- 26' standard deck length
- 20" loaded deck height
- 6" ground clearance
- Four-beam design
- 130,000 PSI yield flanges
- 80,000 PSI yield web
- 8" I-beam X-member, 24" centers
- Bent D-rings per side (x4)
- Removable outriggers per side (x13)
- Expanded metal tool tray
- 1 3/4" Apitong floor (center open)

GOOSENECK

- Hydraulic removable with Posi-Latch
- Non-ground bearing
- Set up for wet-line operation
- Adjustable 5 position ride height
- 84"-108" swing clearance
- 50" king pin height, 2" pin, 15" setting

REAR BRIDGE

- Fixed rear bridge
- 40" rear deck height
- V-style boom trough
- D-rings at rear of trough (x2)
- Load bearing bolsters
- Air lift rear axle (std.55T)
- Flag holders
- Lugs for future flip/booster (std.55T)

SUSPENSION

- 25,000 lb air ride
- Automatic/manual air control system

AXLES

- 25,000 lb nominal
- 60" spacing (std.55T)
- Tapered spindles
- Automatic slack adjusters
- Hub piloted 10-stud mount
- Outboard cast drums
- 16 1/2" x 7" brakes (QC)

WHEELS / TIRES

- 8.25" x 22.5" steel disc wheels
- 255/70R22.5, 16 ply tires

ELECTRICAL SYSTEM

- D.O.T. approved 12V/7-way
- LED-sealed beam lights and harness
- Marker lights/mid-turn signals
- Third tail as strobe light (std.55T)

Options*

- 13 HP power package
- Dual hydraulic system
- Load bearing wheel covers
- Rear deck to bridge ramp
- 24" flip neck box
- Flip axle

- Single axle booster
- Tandem axle booster
- Aluminum wheels
- Air weigh scale
- Tire inflation system
- Disc brakes

* Additional options available

Warranty

- 5 year prorated frame
- 3 year prorated paint
- 1 year on remainder of trailer

UNITED STATES

Kalyn Siebert
1505 West Main Street
Gatesville, Texas 76528
(254) 248-3327
wchandler@kalyntx.com

EXPORTS

DEGA Exports Department
Tel (972) 479-0333
Fax (972) 479-0336
sales@dega.com

